

Create new property

Properties

Properties are the characteristics used to describe a Type of an Object. There are a lot of properties which are common and used to describe many Objects like Name, Address, Description, etc. A lot of those properties are already created in the default LAPIS installation. If the properties which were initially set with system default installation are not the ones you are used to or don't describe the Types you would like to see in your LAPIS system, we allow you to change their possible values, to create new properties and to change the way they are listed on the page or to choose which property from the existing ones to assign to your type. So, before creating a new proper ty it is good to search your LAPIS database for the existing ones. All properties are marked with the sign listed here

PROFUZ
LAPIS

Create New ▾ My Area ▾ Operations ▾ Workflows ▾ Administration ▾

Search: [:types INHERITS "Property"]

⌕

Advanced search Save search

Explorer ▾

Filter results

Folder of Administra...
Examples

Categories ▾

No results

Messages ▾

No results

Search Sessions ▾

No results

Bookmarks ▾

Search Results

1-15/200+ ▾

	Title	First Details	Second Details	Types	Created At	User Updated At	
<input type="checkbox"/>	Minutes to Round to (Integer)	Count: Zero or one		Property	Nov 12, 2024, 3:53 PM	Nov 12, 2024, 3:53 PM	⋮
<input type="checkbox"/>	Client ([:types INHERITS "Contact"] AND [:contactType I...	Count: Zero or one		Property	Nov 12, 2024, 2:35 PM	Nov 12, 2024, 2:35 PM	⋮
<input type="checkbox"/>	To (Immediate Value)	Count: Exactly 1		Property	Nov 8, 2024, 9:01 AM	Nov 8, 2024, 9:01 AM	⋮
<input type="checkbox"/>	From (Immediate Value)	Count: Exactly 1		Property	Nov 8, 2024, 9:01 AM	Nov 8, 2024, 9:01 AM	⋮
<input type="checkbox"/>	Restrictions (Restriction)	Count: Any		Property	Nov 8, 2024, 9:01 AM	Nov 8, 2024, 9:01 AM	⋮
<input type="checkbox"/>	Base Types (Type)	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Java Type (Symbol)	Count: Zero or one		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Properties (Property)	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Instance Thumbnail (Thumbnail Hash)	Count: Zero or one		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Additional Types Properties (Property)	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Is Versioned by Default (Integer)	Count: Zero or one		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Default Instance Permissions (Permissions Restricted H...	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Properties View Placement (Properties Placement Restr...	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Properties Edit Placement (Properties Placement Restr...	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮
<input type="checkbox"/>	Properties New Placement (Properties Placement Restr...	Count: Any		Property	Nov 8, 2024, 8:58 AM	Nov 8, 2024, 8:58 AM	⋮

1-15/200+ ▾


Copyright - Profuz Digital 2014-2024

About Licenses License Agreement Help

The property holds different types of data such as Number, Strings, Date, Color, List, Symbol, Boolean and many more. Many types of data, as the ones listed here before, are already created in the Default LAPIS installation, but new ones can be defined by you or by us upon request. Usually, you will need to create a new property if there isn't an existing one matching your needs for defining your specific Type(s).


Create New Property

To create a new property, you will have to go to Application Main Menu, choose Create New -> Other

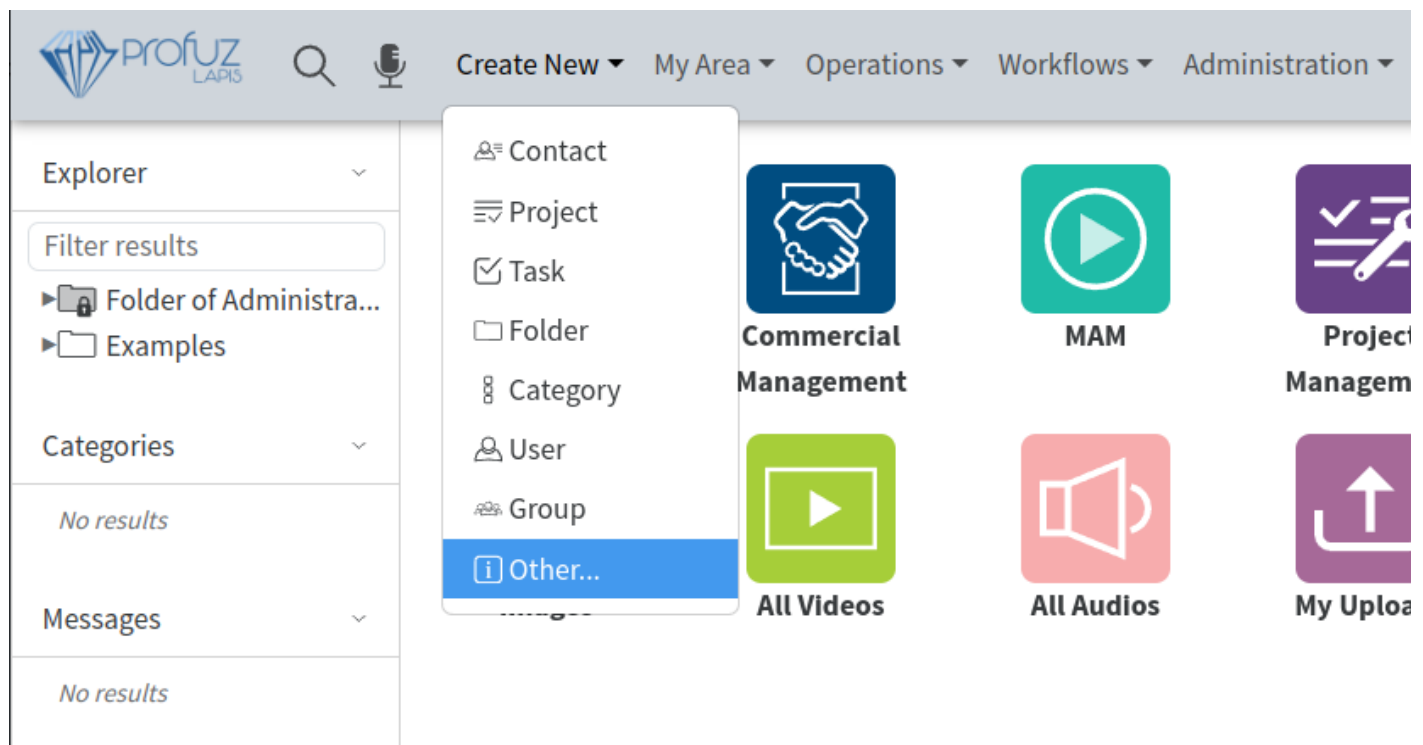


Search for type Property

Search for Property type select it and click Save.

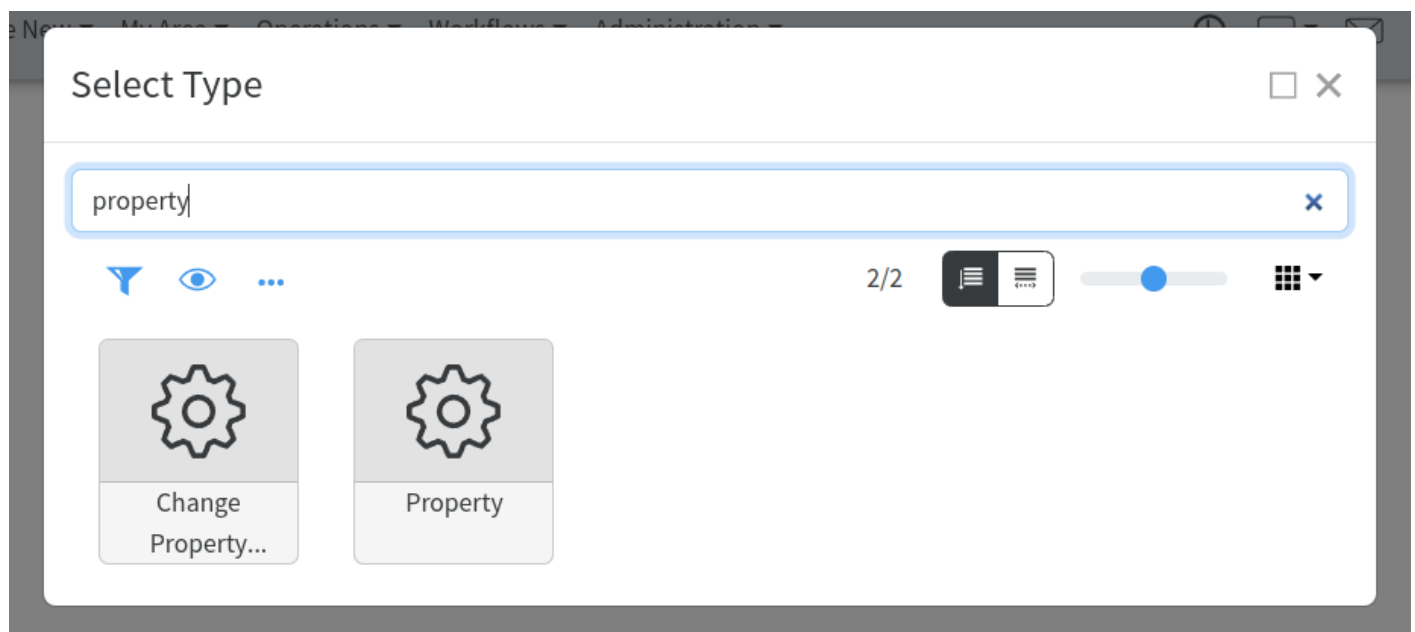

When you do it, the following page will open to fill in with your information:

Created by administrator on 11/16/2024, 6:59:26 PM

 (Draft-Property)

Collaborators: administrator

Standard edit

Name *

Count *

From 0 To ∞

Display Name *

Property Type *

Filter...

Query

Cancel


Create

13

In the **Name** field, you have to define a name of the proper ty used to identify it. Usually it is a unique name, but if you chose an existing name, it is possible to overwrite a property used in some Type with your own property. The Name field must be written without any spaces. **Count** defines the number of values this property will contain as data. From 0 to 1 means that there can be no or one value. From 1 to 1 means that there will be only one value and this value is mandatory. If these fields are greater than 1, this property will contain multiple values. From 0 to ∞ means that there is no limitation on the number of values.

Display Name is used to define what you will see in the User Interface. Display Name can be defined in one or multiple languages. For adding Display Name in other languages, please click on the “+” sign and chose the language(s) one by one.

Created by administrator on 11/16/2024, 6:59:26 PM

 My New Property (Draft-Property)

Collaborators: administrator

Standard edit

Name *

Count *

From 0 To ∞

Display Name *

Property Type *

Filter...

Query

Cancel

Create

6

Created by administrator on 11/16/2024, 6:59:26 PM

My New Property () (Draft-Property)

Standard edit

Collaborators: administrator

Name *

myNewProperty

Count *

From

0

To

∞

Display Name *

Ma nouvelle propriété

English

français

Property Type *

Filter...

Query

Cancel

Create

14

Created by administrator on 11/16/2024, 6:59:26 PM

My New Property (String) (Draft-Property)

Standard edit

Collaborators: administrator

Name *

myNewProperty

Count *

From

0

To

∞

Display Name *

Ma nouvelle propriété

English

français

Property Type *

String

Query

Cancel

Create

15

Property Type defines the format of the data and its interpretation. In the example above the chosen String property type allows textual data in multiple languages.

In order to see all default created properties, use the following search:

```
([:types INHERITS "Type"] AND (([:baseTypes ( INHERITS "ImmediateValue" )]))) SORT BY :id
```

Revision #2

Created 15 November 2024 15:57:17 by Pierre

Updated 16 November 2024 17:05:41 by Pierre