

Managing Permissions

Understanding Permissions logic

Permissions in LAPIS are per object. They control the common operations that are allowed or denied on an object for particular Users and Groups. The most important ones are:


- **read** – allows/denies an object to be accessible
- **write** – allows/denies an object to be modifiable
- **delete** – allows/denies object to be delete-able
- **download** – allows/denies an object to be downloadable
- **owner** – allows/denies all operations

Each object in the system has **explicitly set** and **implicit** permissions. Explicit permissions are set to each object and can be changed manually, while **implicit** permissions are applied to an object through connected to it other objects (for example from a Folder object in which it is present) or other rules (for example an Assignee property gives permissions to its Task). Combination of explicit and implicit permissions gives the effective permissions of an object. Explicit permissions overwrite the Implicit permissions. **Deny** of an operation has priority in effective (combined) permissions.

When an object is created in the system it receives the default explicit permissions as set for its type. This is configured in the “Default Instance Permissions” property in the corresponding Type or if not set there, from the first ancestor Type in which it is defined.

Define Default Instance Permissions for a Type

You have to be part of Administrators group to be able to perform these tasks. Go to the menu Administration/Types and find the type you want to manage.

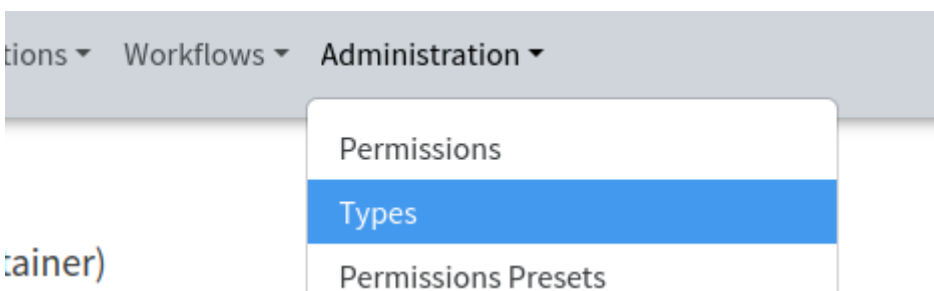

Asset

(Type)

Last modified by [Administrator](#) on 12/01/2024, 06:31:46

Properties

Name

Asset

Display Name

Asset

Base Types

Object

Java Type

Properties

Name (Symbol), Contents (File-StreamableContent), Title (String), Description (String)

Instance Thumbnail

Additional Types Properties

Is Versioned by Default

Default Instance Permissions

Edit Default Instance Permissions

Properties View Placement

Name: wide

Content: wide

Edit the “Default Instance Permissions” property, add users, groups or Everyone and allow or deny the operations you want for each of those:

Edit Default Instance Permissions (Permissions Restricted Hash) for A... □ ×

Group: Everyone	Operation	Allow	Deny	▼
Group: Managers	Operation	Allow	Deny	▼
Group: Editors	Operation	Allow	Deny	^
	relate:	<input type="checkbox"/>	<input type="checkbox"/>	
	download:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	viewer:	<input type="checkbox"/>	<input type="checkbox"/>	
	collaborator:	<input type="checkbox"/>	<input type="checkbox"/>	
	delete:	<input type="checkbox"/>	<input type="checkbox"/>	
	read:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	writeOnCreate:	<input type="checkbox"/>	<input type="checkbox"/>	
	write:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	createInstance:	<input type="checkbox"/>	<input type="checkbox"/>	
	owner:	<input type="checkbox"/>	<input type="checkbox"/>	

Add for everyone

Add new user or group

Add groups

Add new property

Get Effective Permissions

Cancel

Save

Note that those permissions will be applied to the objects created from now on. All existing objects will keep their existing permissions.

Using Folders, Categories and Tags to manage permissions

Folders, Categories and Tags are all configured to provide inherited permissions to objects they contain. It is enough to set or change permissions to a folder in order to easily propagate them to multiple objects. Note that objects' explicit permissions will overwrite those set in a folder.

Change explicit permissions of a particular object

Click on Edit Permissions button in the object header:

Turbo20 Trailer.mp4 (video/mp4) (FileRecord-Video)

Create Subtitle Suite

Make Asset

Transcribe with Microsoft

Full Delete

DREAMWORKS

ANIMATION SKG

00:00:00:00 / 00:00:19:23 -0:19

Properties

Start Timecode

Timecode Keyframes

Time

Timecode

No Entries

File Copies

Turbo20 Trailer.mp4

4.44 MB

video/mp4

Turbo20 Trailer.mp4

4.44 MB

video/mp4

Turbo20 Trailer.mp4

4.44 MB

video/mp4

Drop files here, choose files or

upload files

Transformations

transcribe_Turbo20 Trailer.srt

346 B

application/x-subrip

then click on “Edit Permissions”:

Permissions (Permissions Restricted Hash)

Edit Permissions

Cancel

Save

and set the permission you want to be applied to this object:

Edit Permissions (Permissions Restricted Hash) for Turbo20 Trailer.m...

×

Group: Managers

Operation

Allow

Deny

⌵

Property: owners

Operation

Allow

Deny

⌵

User: Storage Demo User

Operation

Allow

Deny

⌶

relate:

download:

viewer:

collaborator:

delete:

read:

writeOnCreate:

write:

createInstance:

owner:

☐

☐

☐

☐

☐

☒

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

Add for everyone

Add new user or group

Add groups

Add new property

Get Effective Permissions

Cancel

Save

Revision #2

Created 15 November 2024 16:25:27 by Pierre

Updated 15 November 2024 19:55:27 by Pierre